



FSL100 Series Flame Detectors UV, UV/IR, IR3

UV, UV/IR, IR3 Flame Detectors

The FSL100 Series of flame detectors from Honeywell delivers robust, fast, and reliable detection of flaming fires in a wide range of applications.

The range consists of UV, UV/IR and IR3 flame detectors. All utilize sophisticated sensing and signal analysis to detect fires quickly while also rejecting false alarms.

The FSL100 may be small and lightweight for easy installation but it is designed to work in tough indoor/outdoor environments, as well as potentially explosive atmospheres.

With a large field of view it can detect a range of different types of fire including hydrocarbon and non-hydrocarbon sources. Available in UV, UV/IR and IR3 we have your application covered.



Honeywell recommends using a swivel mount for all installations and testing installed flame detectors once per year with an approved test lamp.

Suitable for Many Applications

- UV, UV/IR and IR3 available
- Hydrocarbon and non-hydrocarbon sources
- Use in potentially explosive atmospheres
- Indoor and outdoor operation
- High visibility red or discrete white models available

Great Performance

- Approved to EN54-10 and FM3260 flame detector standards
- Comprehensive automatic self test
- Remote manual self test option

Fast & Reliable

- High speed sensors and microprocessor
- Sophisticated analysis algorithms
- False alarm rejection

Reduced Life Cost

- Long life elements
- Pressure compensation to avoid contamination
- 2 year warranty

Ease of Installation and Use

- Relay and mA outputs as standard
- Lightweight GRP housing
- Pre-formed knockouts
- Optional swivel mounting bracket
- Long range test lamp available

FSL100-UV



- Suitable for indoor applications; for example fume hoods and hydrogen storage areas
- Effective solution for materials burning with low temperatures, e.g. Sulphur
- Alarms to fires from heavy hydrocarbons (wood, paper, petroleum, etc.), light hydrocarbons (methanol, methane, etc.), and hydrogen
- Good resistance against the influences of:
 - Direct and reflected sunlight
 - Artificial light, such as fluorescent tubes and glass covered halogen lamps



FSL100-UV/IR




- Analysis of the flame flicker-frequency for improved false alarm rejection
- Dual sensing methodology enables a wide range of hydrocarbon and non-hydrocarbon fires to be effectively detected
- Good resistance against the influences of:
 - Direct and reflected sunlight
 - Artificial light, such as fluorescent tubes and glass covered halogen lamps
 - Arcs and electric discharges (static or from e.g. electric motors)
 - The radiation from electric welding provided that the electric welding takes place at a distance more than 10 feet from the flame detector (a welding rod contains organic compounds which may produce a small flame)



FSL100-IR3



- Analysis of the flame flicker frequency for improved false alarm rejection
- Particularly suited to liquid hydrocarbon and dirty fires
- Affected less by window contamination or smoky fires
- Good resistance against the influences of:
 - Direct and reflected sunlight
 - Artificial light, such as fluorescent tubes and glass covered halogen lamps
 - Arcs and electric discharges (static or from e.g. electric motors)
 - The radiation from electric welding provided that the electric welding takes place at a distance more than 10 feet from the flame detector (a welding rod contains organic compounds which may produce a small flame)
- Especially suitable fires that emit large amounts of smoke

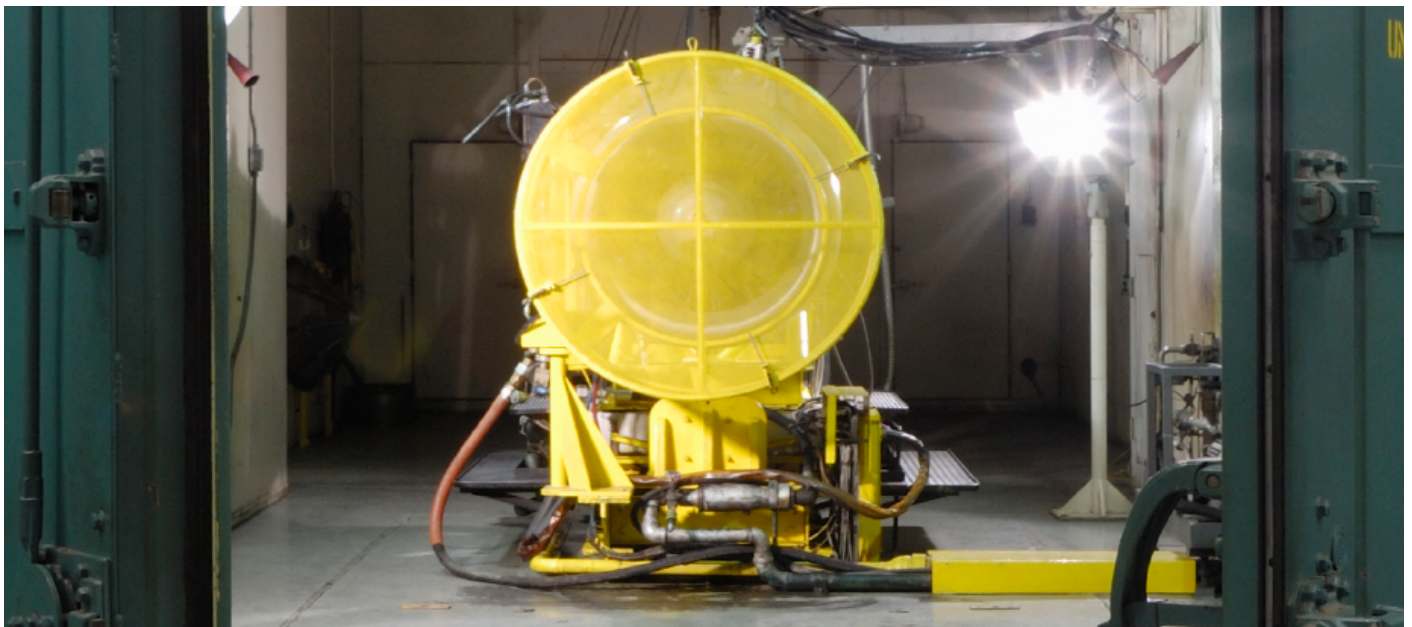

APPLICATIONS

APPLICATION*	UV	UV/IR	IR3
Aircraft hangars		✓	✓✓
Atriums		✓	✓✓
Battery storage rooms / data communication	✓	✓✓	
Biogas		✓	✓✓
Car, bus, tram and train parking		✓	✓✓
Clean rooms: semi-conductor, pharmaceutical, & hospital operating rooms	✓	✓✓	
CNG filling/refilling for buses (public transportation)		✓✓	✓✓
Cold storage	✓✓		
Diesel engine rooms		✓	✓✓
Electric power transformers		✓✓	✓
Engine test cells/rooms	✓	✓✓	✓✓
Fume hoods	✓✓	✓	
Gas cabinets	✓	✓✓	✓
Gas/Gasoline engine rooms	✓	✓✓	✓✓
Heating rooms for chemicals	✓✓	✓	
Indoor chemical, fuel, and solvent storage	✓	✓✓	✓
Indoor hydrocarbon storage and processing	✓	✓	✓✓
Indoor hydrogen storage and processing	✓✓	✓✓	
Laboratories	✓	✓✓	✓
Loading and unloading terminals: truck, rail, & marine		✓✓	✓✓
Monitoring of machinery	✓	✓✓	✓✓
Oil and Gas pipe line and pumping stations		✓	✓✓
Outdoor chemical, fuel, paint, and solvent storage		✓	✓✓
Outdoor hydrogen storage and processing		✓✓	
Paint spray booths			✓✓
Radio amplifier rooms / Isolators for antennas	✓✓		
Recycling and waste processing plants		✓	✓✓

Suitable ✓ Recommended ✓✓

*Please contact your regional sales representative to discuss your application



GENERAL SPECIFICATION

SPECIFICATIONS: FSL100 SERIES FLAME DETECTORS	
FSL100 Flame Detector types	FSL100-UV, FSL100-UVIR and FSL100-IR3; Choice of red or white housings
Range	110 ft / 35 m (IR3), 25 m/80 ft (UV, UV/IR) alarming within 10 seconds to a 1 ft2(0.1 m²)n-heptane fire
Cone of vision	90 ° minimum horizontal and vertical
Power	10-28 VDC (12-24 VDC nominal)
Local LEDs	<ul style="list-style-type: none"> Continuous green: normal operation Continuous yellow: fault Flashing yellow: Fault and guide to repeat self-test after a self-test failure Continuous red: alarm
Current output	Standard available 4–20 mA (stepped, sinking, non-isolated) <ul style="list-style-type: none"> 0 mA power fault / microprocessor fault 2 mA optical fault 4 mA normal operation >20 mA alarm
Relay output: - Alarm relay - Fault relay	De-energized during normal operation, no alarm, SPDT, 30 VDC – 2 A, 60 W max. Energised during normal operation, no fault, SPDT, 30 VDC – 2 A, 60 W max.
Cable gland & terminals	Cable entry M20 clearance. Supplied with gland suitable for cable diameter from 0.2" (5.5mm) to 0.5"(13mm). Terminals suitable for 0.5mm² (20AWG) to 1.5mm² (15AWG) wire
Start up times	<10 sec
Alarm response time	8 to 30 sec
Alarm output settings	Selectable LEDs and relays latching/non-latching; factory setting: latching
Automatic & manual Self-Test	Automatic Sensor Test (built in Self-Test) and manual Self-Test
Operating current normal	25 mA at 24 VDC
Current in alarm, at 24 VDC	±75 mA at 24 VDC
Connections to:	<ul style="list-style-type: none"> Fire control panels using end of line (EOL) and alarm resistors (current increase) Devices that operate via relay switched outputs PLCs with 4–20 mA inputs
End of line and alarm resistor	To be adjusted to the fire control panel; free terminals are dedicated to the resistors Note: the alarm and EOL resistor must be rated 2 W min. each and the total power dissipation of both alarm and EOL resistor should not exceed 2 W
Housing	Glass Reinforced Polyester (GRP), Non-incendive. UV resistant, Self-Extinguishing V-0 (UL-94)
Swivel Mount	PA66, UV resistant; Stainless Steel fixings; 280 g (0.62 lb)
Pressure compensating element	PCE (Pressure Compensating Element) avoids moisture build-up in the detector housing due to changes in ambient air-pressure
Dimensions	4.9 x 3.15 x 2.25 in (125 x 80 x 57 mm)
Weight	1.05 lb (465 g)
Ingress protection	IP65
Temperature, operating	–40 °F to +158 °F (–40 °C to +70 °C)
Temperature, ambient ATEX and FM class 3611	–13 °F to +158 °F (–25 °C to +70 °C)

Honeywell Gas and Flame Detection

Honeywell is able to provide best-in-class gas and flame detection solutions to meet the requirements of all applications and industries. Contact us in the following ways:

HEADQUARTERS

Europe, Middle East, Africa

Life Safety Distribution GmbH
Javastrasse 2
8604 Hegnau
Switzerland
Tel: +41 (0)44 943 4300
Fax: +41 (0)44 943 4398
gasdetection@honeywell.com

Customer Service:

Tel: 00800 333 222 44 (Freephone number)
Tel: +41 44 943 4380 (Alternative number)
Fax: 00800 333 222 55
Middle East Tel: +971 4 450 5800 (Fixed Gas Detection)
Middle East Tel: +971 4 450 5852 (Portable Gas Detection)

Americas

Honeywell Analytics Distribution Inc.
405 Barclay Blvd.
Lincolnshire, IL 60069
USA
Tel: +1 847 955 8200
Toll free: +1 800 538 0363
Fax: +1 847 955 8210
detectgas@honeywell.com

RAE Systems by Honeywell
Phone: 408.952.8200
Toll Free: 1.888.723.4800
Fax: 408.952.8480

Asia Pacific

Honeywell Analytics Asia Pacific
7F SangAm IT Tower,
434, Worldcupbuk-ro, Mapo-gu,
Seoul 03922,
Korea
Tel: +82 (0) 2 6909 0300
Fax: +82 (0) 2 2025 0328
India Tel: +91 124 4752700
China Tel: +86 10 5885 8788 3000
analytics.ap@honeywell.com

TECHNICAL SUPPORT

EMEA: HAexpert@honeywell.com
US: ha.us.service@honeywell.com
AP: ha.ap.service@honeywell.com

www.honeywellanalytics.com
www.raesystems.com

Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.

13475_H_FSL100_DS01155_V2_AMER
10/16
© 2016 Honeywell Analytics

Honeywell